

FMR-232R

Computer Receiver with 2 Relay Outputs & Database Software

Features

- Used in conjunction with computer database software
- 2-channel Receiver with supply, antenna, RS232C & relay connections
- Up to 500 different transmitters can be entered into the database

Applications

- For monitor of transmission of remote control transmitters using computer database software

Description

The FMR-232R is a two-channel receiver with supply, antenna, RS232C and relay connections. The receiver is enclosed in Elsema's black UBB plastic case.

The FMR-232R receiver is used to monitor the transmission of remote control transmitters using computer database software.

The software runs on an IBM computer and has a database to which it records the transmitter identity every time the transmitter is used. Each transmitter can have up to five different identifiers. For example, the name, phones, fax and address of a person using the transmitter.

Up to five hundred different transmitters can be entered into the database.

The software can be configured to prompt the computer user an alarm dialog box when a transmitter is transmitted. It can even operate two different relay outputs. Each relay has a software momentary mode.

A demo version of the software can be downloaded from the website. If the hardware receiver and transmitter are to be used, the registered software must be purchased.

All FMT-... series transmitter can be used with this registered software.

Elsema's ANT27MHz series antennas will give a reliable control range of up to 200 metres, when used with Elsema's FMT-301, FMT-302 and FMT-304 transmitters.

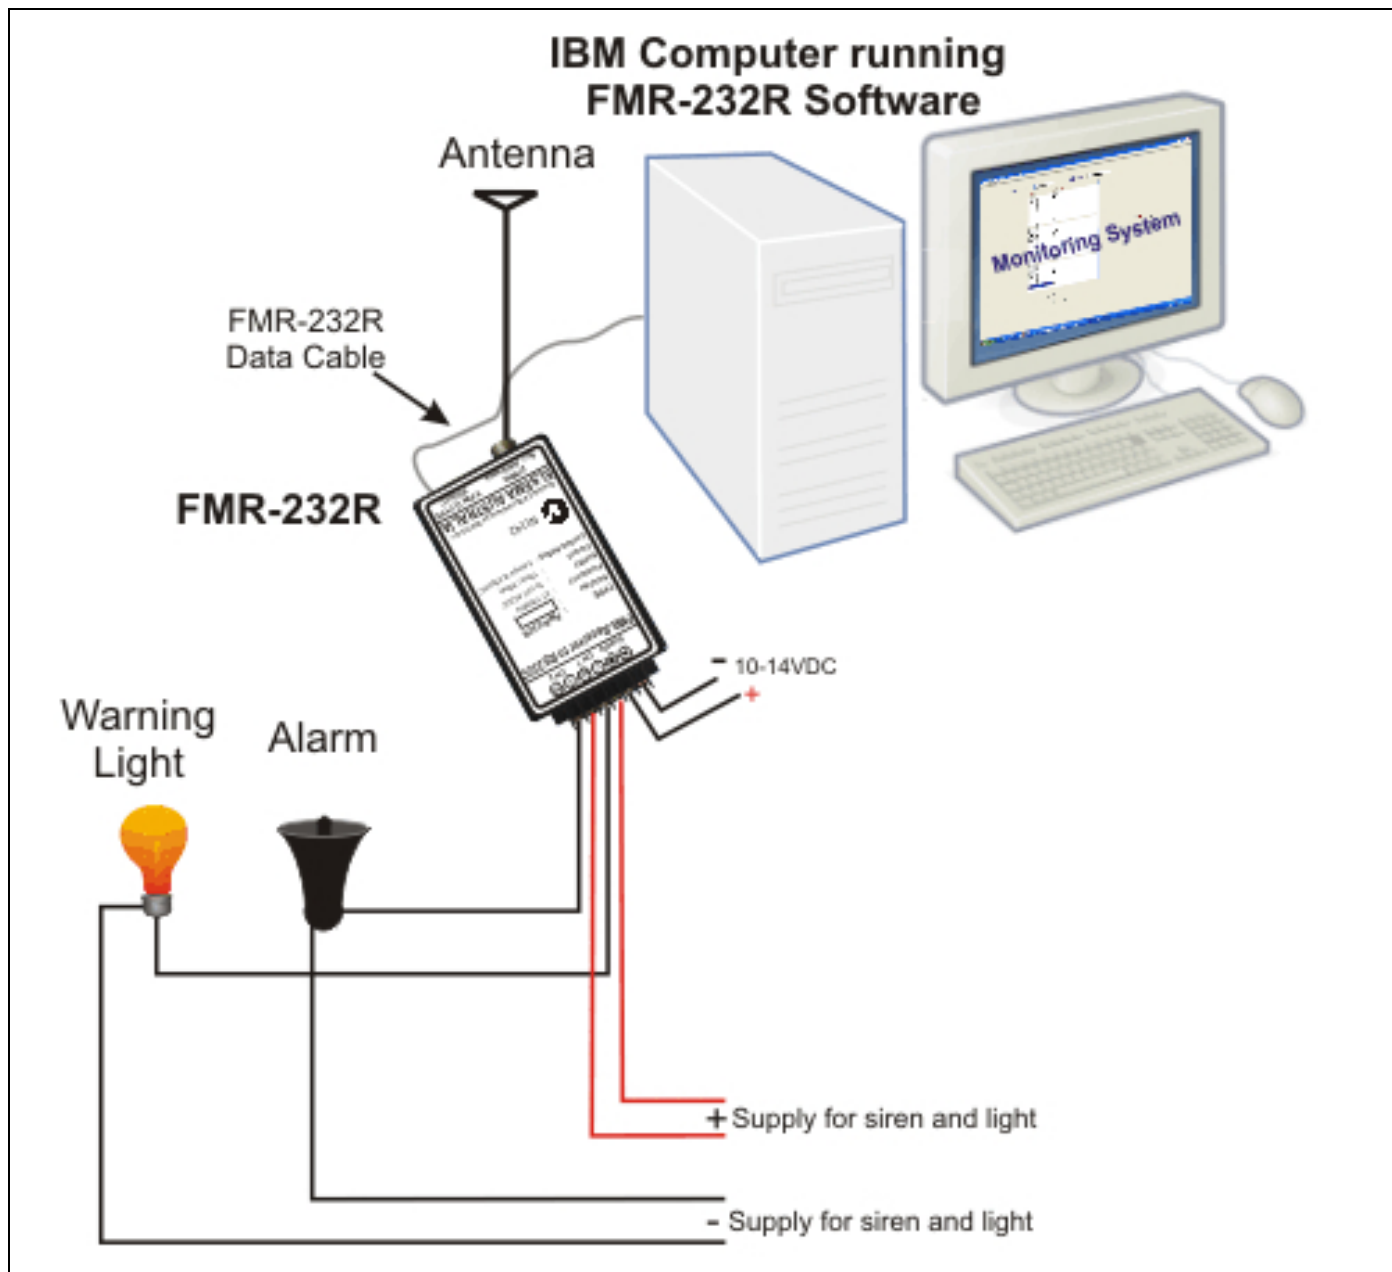


Products in the Range

				
<p>FMR-201 Single Channel Receiver with Open Collector Output</p>	<p>FMR-203 2-Channel PCB Strip Receiver</p>	<p>FMR-212 Single Channel Receiver with Relay Output</p>	<p>FMR-212T Single Channel Receiver with Timer Controlled Relay Output</p>	<p>FMR-24001 Single Channel 240VAC Receiver with Relay Output</p>
				
<p>FMR-24002 2-Channel 240VAC Receiver with 2 Relay Outputs</p>	<p>FMR-202 2-Channel Receiver with 2 Relay Outputs</p>	<p>FMR204-12 4-Channel 12V Receiver with 4 Relay Outputs</p>	<p>FMR204-24 4-Channel 24V Receiver with 4 Relay Outputs</p>	<p>FMR-204/16 4/16 Channel Receiver with Open Collector Outputs</p>
				
<p>FMR-232R Computer Receiver with 2 Relay Outputs & Database Software</p>	<p>FMR-100 Receiver for Multi-Channel System</p>	<p>RXD-101 Decoder for Multi-Channel System</p>		

Technical Data

Case	Black UBB Plastic
Supply Voltage	10 - 14 Volts AC or DC
Current Consumption	18mA (Standby) 76mA (Both Relays On)
Receiver Type	Dual Conversion Superheterodyne
Receiving Frequency	27.145MHz (Other frequencies available: 27.045, 27.195 & 27.455MHz. NB. 27.455MHz is available for Europe Only)
Type of Crystal Used	10.245MHz, Fundamental, 20pF, 30ppm 16.495MHz, Fundamental, 20pF, 30ppm
Operating Temperature Range	-5 to 50°C
1st IF Freq	10.7MHz
2nd IF Freq	455kHz
Selectivity	-6dB at ±5kHz, -20dB at ±6kHz
Image Rejection	At 26.285MHz better than -60dB
Sensitivity	-107dBm or 1uV
Type of demodulation	Narrow-bandwidth Frequency Modulation (FM)
Occupied Band Width	±5.0kHz
Baud Rate	4800bps
Data	No parity, 8 bits, 1 stop bit
Connections	Antenna: SO-239 50 ohms socket Supply: 6-way screw type terminal block Data Out: 9-pin female D-type 2 Relay Output Contacts: Common (C) & Normally Open (NO)
Serial Cable	9-pin Male to 9-pin Female
Antenna	Elsema's ANT27MHz series antennas or piece of approximately 300 mm long wire for short range applications.
Dimensions	125 x 80 x 33mm
Weight	194g
Compatible Transmitters	All Elsema type FMT-... 27MHz series and KEY-3.. series

Application Diagram**FMR-232R****Manufactured by**

Elsema Pty Ltd
3/10 Hume Rd, Smithfield
NSW 2164
Ph: 02 9609 4668
Fax: 02 9725 2663
Website: <http://www.elsema.com>