


ANT27S , ANT27M and ANT27L 27MHz 50 OHMS ANTENNAS

Features : ANT27S

- Ground Plain Required
- Unbreakable Mount
- Removable Whip unscrews from Mount
- Suits M1 Adapters – PSO / FSD / SAS
- Mounting Socket Required –SO239
- Pretuned to 27.145MHz

Specifications

TYPE	: Helical Whip
ORDERCODE	: ANT27S
LENGTH	: 40 centimetre
TUNING	: Pretuned
FREQUENCY	: 27.145 MHz
IMPEDANCE	: 50 ohms Nominal
MAX. POWER	: 25 Watts
TERMINATION	: Pre-terminated feed
PATTERN	: Omni Directional
APPLICATION	: For use with Elsema Receiver
VSWR	: 1.5 : 1 over 300 KHz

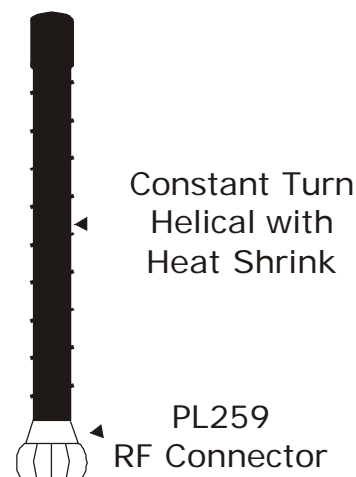

Features : ANT27M and ANT27L

- Ground Independent Mounting (GIM).
- Unbreakable Swivel Mount
- Removable Whip unscrews from Mount
- Suits M1 Adapters – PSO / FSD / SAS
- Pretuned to 27.145MHz
- Supplied with 3.60 metre cable and connector

Specifications

TYPE	: Helical Whip with GIM
ORDERCODE	: ANT27M is 1.0 metre long : ANT27L is 1.8 metres long
FREQUENCY	: 27.145 MHz
IMPEDANCE	: 50 ohms Nominal
MAX. POWER	: 20 Watts
TERMINATION	: Pre-terminated feedline with PL259
PATTERN	: Omni Directional
APPLICATION	: For use with Elsema transmitters and receivers
VSWR	: 1.5 : 1 over 300 KHz

