

# Batteries and Power Packs

## 4LR44



<b>Part No</b>	4LR44
<b>Battery Voltage</b>	6Volts
<b>Battery Type</b>	Alkaline battery for all Elsema KEYRING type transmitters.

## 6F22




<b>Part No</b>	6F22
<b>Battery Voltage</b>	9 Volts
<b>Battery Type</b>	Carbon Battery for all <a href="#">FMT-series</a> , <a href="#">GLT-series</a> and <a href="#">MCT-series</a>

## 6LR61




<b>Part No</b>	6LR61
<b>Battery Voltage</b>	9 Volts
<b>Battery Type</b>	Alkaline Battery for all <a href="#">FMT-series</a> , <a href="#">GLT-series</a> and <a href="#">MCT-series</a>

## LAB12-1.2




**OUTER DIMENSIONS**

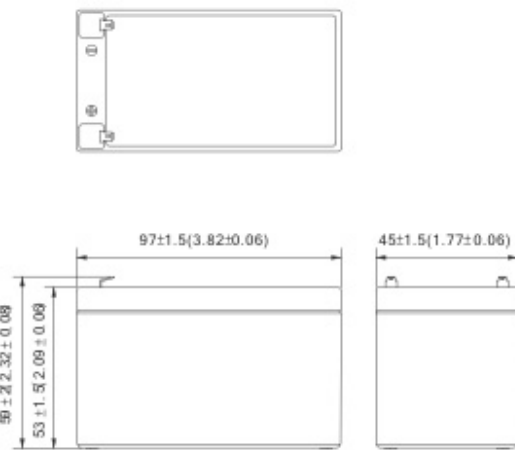



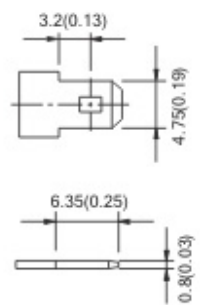

**TERMINAL TYPE**  
mm(inch)

• Terminal T1



**TERMINAL POSITION**



<b>Part No</b>	LAB12-1.2
<b>Battery Voltage</b>	12V 1.2Ah
<b>Battery Type</b>	Rechargeable Battery. 97 x 45 x 59 mm (approx 590g)

**LAB12-7.0**

**B.B. BATTERY**  
VRLA Rechargeable Battery

**BP7-12**  
(12V/7Ah/Gel/1.75VPC/20°C)

**CAUTION**  
 • Do not recharge in a gas tight container.  
 • Do not short the battery terminals.  
 • Flush with water if needed.  
 • If contaminated with electrolyte/acid, it must be treated with electrolyte/acid.  
 • Battery must be recycled. For recycling information, consult IATA call 900-275-2800.

Nonspillable  
 Recycle  
 VdS  
 CE  
 RoHS  
 Pb  
 MADE IN CHINA

CE  
 RU<sup>®</sup>  
 MH19884

nqa.  
**ISO 9001**  
 Registered

UKAS  
 CLIMATE  
 MANAGEMENT  
 015

**WSC**  
**ISO 14001**

A/3 REV. Jan. 2009

**TERMINAL TYPE**  
mm(inch)

**OUTER DIMENSIONS**

• Terminal T1  
 3.2(0.13)  
 4.75(0.19)  
 6.35(0.25)  
 0.8(0.03)

• Terminal T2  
 3.4(0.13)  
 6.35(0.25)  
 7.85(0.31)  
 0.8(0.03)

151 ± 1.5(5.94 ± 0.06)  
 98 ± 0.2(3.86 ± 0.06)  
 93 ± 1.5(3.66 ± 0.06)

65 ± 1.5(2.56 ± 0.06)

**TERMINAL POSITION**

<b>Part No</b>	LAB12-7.0
<b>Battery Voltage</b>	12V 7Ah
<b>Battery Type</b>	Rechargeable Battery. 151 x 65 x 98 mm (approx 2540g)

**12PP1000**

<b>Part No</b>	12PP1200
<b>Input Voltage</b>	230-240 Volts AC
<b>Output Voltage</b>	12 Volts DC 1000mA

**24PP**

<b>Part No</b>	24PP
<b>Input Voltage</b>	230-240 Volts AC
<b>Output Voltage</b>	24 Volts AC 500mA

**Manufactured by**

**Elsema Pty Ltd**  
 3/10 Hume Rd, Smithfield  
 NSW 2164  
 Ph: 02 9609 4668  
 Fax: 02 9725 2663  
 Website: <http://www.elsema.com>